

08/759956



LAW OFFICES

SUGHRUE, MION, ZINN, MACPEAK & SEAS

2100 PENNSYLVANIA AVENUE, N.W.

WASHINGTON, D.C. 20037-3202

TELEPHONE

(202) 293-7060

December 3, 1996

TELEX

6491103

FACSIMILE

(202) 293-7860

(202) 293-9131

JAPAN OFFICE

TOEI NISHI SHIMBASHI BUILDING 4F

13-5 NISHI SHIMBASHI 1-CHOME

MINATO-KU, TOKYO 105 JAPAN

TELEPHONE (03) 3 503-3760

FACSIMILE (03) 3 503-3756

BOX: PATENT APPLICATION

Assistant Commissioner for Patents

Washington, D.C. 20231

Re: Application of Tadashi KOJIMA, Koichi HIRAYAMA, Hisashi YAMADA,
Yoshiaki MORIYAMA, Fumihiko YOKOGAWA, Takao ARAI, Toshifumi TAKEUCHI,
Shinichi TANAKA, Akira KURAHASHI and Toshiyuki SHIMADA
DIGITAL DATA TRANSMITTING METHOD
Our Reference: Q43566

Dear Sir:

Attached hereto is the application identified above including the specification, claims and eight (8) sheets of drawings. The executed Declaration and Power of Attorney and Assignment will be submitted at a later date.

The Government filing fee is calculated as follows:

Total Claims	14 - 20 =	0 x \$22 =	\$ 000.00
Independent Claims	3 - 3 =	0 x \$80 =	\$ 000.00
Base Filing Fee	(\$770.00)		\$ 770.00
Multiple Dep. Claim Fee	(\$260.00)		\$ 000.00
TOTAL FILING FEE			\$ 770.00

A check for the statutory filing fee of \$ 770.00 is attached. You are also directed and authorized to charge or credit any difference or overpayment to Deposit Account No. 19-4880. The Commissioner is hereby authorized to charge any fees under 37 C.F.R. 1.16 and 1.17 which may be required during the entire pendency of the application to Deposit Account No. 19-4880. A duplicate copy of this transmittal letter is attached.

Priority is claimed from:

Japanese Patent Application

7-316420

Filing Date

December 5, 1995

The priority document will be submitted at a later date.

Respectfully submitted,

SUGHRUE, MION, ZINN, MACPEAK & SEAS
Attorneys for Applicant(s)

By:

Darryl Mexic

Darryl Mexic

Reg. No. 23,063

DM:caw



ATTN: BOX MISSING PARTS

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Patent Application of

Tadashi KOJIMA, Koichi HIRAYAMA, Hisashi YAMADA, Yoshiaki MORIYAMA, Fumihiko YOKOGAWA, Takao ARAI, Toshifumi TAKEUCHI, Shinichi TANAKA, Akira KURAHASHI and Toshiyuki SHIMADA

Serial No.: 08/759,956

Filed: December 3, 1996

For: DIGITAL DATA TRANSMITTING METHOD

SUBMISSION OF FORMAL DRAWINGS

ATTENTION: OFFICIAL DRAFTSPERSON

Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

Submitted herewith please find **eight (8)** sheets of formal drawings. The Office is respectfully requested to acknowledge receipt of these formal drawings.

Respectfully submitted,

Darryl Mexic
Registration No. 23,063

SUGHRUE, MION, ZINN, MACPEAK & SEAS
2100 Pennsylvania Avenue, N.W.
Washington, D.C. 20037-3202
Tel: (202) 293-7060
DM:dmo

Date: April 9, 1997

08759956



770-101 A
08/759956

DIGITAL DATA TRANSMITTING METHOD

BACKGROUND OF THE INVENTION

Field of the Invention

The invention relates to a method of transmitting digital data in which digital data is retained in sectors each comprising a plurality of sync frames and sequentially transmitting it (including recording of the digital data).

Description of Background Information

As an RLL (Run Length Limited) encoding method which is performed in order to transmit digital data indicative of information or record the digital data to a recording medium, an EFM (Eight to Fourteen Modulation) which is used for a CD (compact disc) or the like is known.

In the EFM, digital data of eight bits (one byte) is converted to a run length limited code of 14 bits which satisfies run length limitations of:

minimum run length $d = 2T$;

maximum run length $k = 10T$,

connection bits of three bits are added to intervals among the respective converted data, and the resultant data is formed as an EFM modulation signal. In a sequence of the EFM modulation signals as well, a bit train of the connection bits is set so as to satisfy the foregoing run length limitation.

In the CD, a signal obtained by adding a sync signal

to the EFM modulation signal has been recorded. The sequence by the EFM modulation signals is constructed in a manner such that a repetitive pattern of maximum interval which corresponds to the maximum run length k, namely, repetitive pattern such as 11T - 11T doesn't exist in the sequence and the repetitive pattern of 11T is used as a sync signal.

In a CD player, the sync signal is extracted by detecting the repetitive pattern of 11T from a signal read out from the CD.

In a DVD (digital video disc) in which recording information has been recorded at a high density or a high-density data transmission, however, when reading the information, it is largely influenced by an inter-symbol interference. The repetitive pattern of 11T as a sync signal is, therefore, changed to a pattern such as 11T - 10T or 10T - 11T and is read out. On the contrary, a case where the data pattern such as 10T - 11T or 11T - 10T as an EFM modulation signal is changed to the repetitive pattern of 11T and is erroneously detected as a sync signal occurs.

As mentioned above, in the high-density recording or high-density data transmission, a frequency of errors which occur in the detection of the sync signal increases and a burst error due to out-of-synchronism easily occurs.

SUMMARY AND OBJECT OF THE INVENTION

The invention is made to solve the problems mentioned above and it is an object of the invention to provide a transmitting method of digital data whereby the digital data can be reproduced at a high precision even at the time of a high-density recording or a high-density data transmission.

According to the invention, there is provided a transmitting method of digital data for retaining digital data in sectors each comprising a plurality of sync frames and sequentially transmitting, wherein the sync frame comprises a sync signal and a run length limited code which corresponds to the digital data and satisfies limitations of a minimum run length and a maximum run length, and the sync signal includes a sync pattern comprising a bit pattern having a run length which is longer than the maximum run length by $3T$ and addition bit patterns which are arranged before and after the bit pattern and each of which has a run length that is longer than the minimum run length.

According to the invention, there is also provided a transmitting method of digital data for storing the digital data into sectors each comprising a plurality of sync frames and sequentially transmitting, wherein the sync frame comprises a sync signal and a run length limited code which corresponds to the digital data and satisfies limitations regarding a minimum run length and a maximum run length, and the sync signal includes a

specific code which indicates a position in the sector and which enables a DC control to be performed.

In order to retain the digital data into the sectors each comprising a plurality of sync frames and sequentially transmit, the sync frame is comprised of the sync signal and the run length limited code which satisfies the limitations of the minimum run length and the maximum run length, and the sync signal includes the sync pattern comprising the bit pattern of the run length that is longer than the maximum run length by $3T$ and the addition bit patterns which are arranged before and after the bit pattern and each of which has a run length that is longer than the minimum run length. The sync signal includes the specific code which indicates the position in the sector and which enables the DC control to be performed.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a diagram showing a schematic construction of a transmission signal forming apparatus for forming a transmission signal by a digital data transmitting method according to the invention;

Fig. 2 is a diagram showing a sync signal according to the invention;

Fig. 3 is a diagram showing the sync signal according to the invention;

Fig. 4 is a diagram showing a format of the sync signal;

Fig. 5 is a diagram showing a transmission signal waveform by a sync pattern;

Fig. 6 is a diagram showing a transmission signal format of one sector;

Fig. 7 is a diagram showing an operation flow of a synthesizing circuit 30; and

Fig. 8 is a diagram showing storage contents in a memory.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Fig. 1 is a diagram showing a construction of a transmission signal forming apparatus for forming a transmission signal by a transmitting method of digital data according to the invention.

In Fig. 1, an 8-16 (eight to sixteen) modulator 10 converts digital data to be transmitted to an 8-16 modulation signal (run length limited code) of 16 bits (one code word) such that run length limitations of the minimum run length $d = 2T$ and the maximum run length $k = 10T$ is satisfied every eight bits.

All of code words obtained by the 8-16 modulator 10 have pattern forms which satisfy any one of the following conditions of Next_State1 to Next_State4.

Next_State1: Code word in which the number of continuous 0 at the termination is equal to 0 or 1.

Next_State2: Code word in which the number of continuous 0 at the termination is equal

to 2 to 5 and the first bit and 13th bit of the next code word are equal to 0.

Next_State3: Code word in which the number of continuous 0 at the termination is equal to 2 to 5 and at least either one of the first and 13th bits of the next code word is equal to 0.

Next_State4: Code word in which the number of continuous 0 at the termination is equal to 6 to 9.

The modulating method has been published by the following paper.

Kees A. Schouhamer Immink, "EFMPlus: The Coding format of the High-Density Compact Disc", IEEE International Conference on Consumer Electronics, WPM6.1, 1995.

A sync signal generating circuit 20 generates 32 sync signals having different bit patterns as shown in Figs. 2 and 3 and transmits them to a synthesizing circuit 30 which preferably includes a CPU and a memory as described later.

Those 32 sync signals are divided into eight groups of SY0 to SY7 as shown in Figs. 2 and 3.

Fig. 4 is a diagram showing a format of the sync signal.

In Fig. 4, bits 1 to 3 of the sync signal denote connection bits provided so as to satisfy the foregoing

limitations of the minimum run length d and the maximum run length k when the sync signal is connected to a code word just before it. A connection bit pattern by bits 1 to 3 indicate any one of $\{000\}$, $\{001\}$, and $\{100\}$.

A sync pattern to identify the sync signal is allocated to bits 11 to 32 of the sync signal.

The sync pattern is a bit pattern of an arrangement such as $(4T \text{ or more} - 14T - 4T)$ in which a pattern of $14T$ that is larger than the maximum interval $11T$ in the 8-16 modulation signal by $3T$ is set to a nucleus and a pattern of a fixed length of $4T$ and a pattern of $4T$ or more are arranged after and before the pattern of $14T$, respectively, namely, bit pattern of

$\{0001000000000000010001\}$.

In this instance, the sync pattern is a fixed pattern which is common to all sync signals as shown in Figs. 2 and 3.

In the sync pattern, even when the $11T$ pattern in the 8-16 modulation signal is edge-shifted due to an influence by an inter-symbol interference and is changed to a pattern of $12T$ and, further, the sync pattern itself is edge-shifted and is shortened by only $1T$, in order enable both of them to be distinguished, the pattern of $14T$ that is larger than the maximum interval $11T$ in the 8-16 modulation signal by $3T$ is used. The $14T$ pattern denotes a shortest length which can be set when considering the edge-shift.

By arranging an addition bit pattern of a fixed length of 4T and an addition bit pattern of 4T or more after and before the 14T pattern, an interval that is larger than the shortest bits of 3T by at least 1T is provided, thereby reducing an influence by the inter-symbol interference with a neighboring mark.

Fig. 5 is a diagram showing a transmission signal waveform by the sync pattern.

As shown in Fig. 5, if points of leading (trailing when the waveform is inverted) of the edges, namely, an interval between points A and B is detected by a slice level shown by an alternate long and short dash line, even when the slice level is not settled by a pull-in operation or the like, the edge interval can be stably detected. By detecting a 18T pattern in which the 14T pattern and the rear 4T pattern are combined and selecting the pattern in which the pattern of 14T exists, the selected pattern can be used as a signal for a speed detection of a spindle servo upon starting. By setting mark lengths before and after the 14T pattern to be equal to or larger than 4T in which an amplitude is larger than the shortest mark length, a permissible amplitude is increased for a fluctuation of the slice level. Although it is also possible to use the combination of marks of 5T or more, according to the embodiment, since an efficiency is preferentially considered, a rear mark length is set to 4T and a front mark length is set to 4T or more.

The reason why the rear pattern of the 14T pattern is set to the fixed length of 4T and the front pattern is set to 4T or more is because when a specific code, which will be described hereinafter, is further set before the 14T pattern, a degree of freedom of the front pattern is increased and the number of patterns to be obtained as a specific code is sufficiently assured.

As shown in Fig. 4, the specific code is allocated to bits 4 to 10 of the sync signal. Depending on the combination with the connection bits which exist just before the specific code, a position in one sector, which will be explained hereinafter, can be identified.

The synthesizing circuit 30 in Fig. 1 selects any one of the sync signals generated by the sync signal generating circuit 20 every train of the 8-16 modulation signals which are sequentially supplied from the 8-16 modulator 10, namely, every 91 code words and generates a signal obtained by adding the selected sync signal to the head of the 91 code words as a transmission signal corresponding to one sync frame.

Fig. 6 is a diagram showing a format of the transmission signal per one sector which is generated by the synthesizing circuit 30.

As shown in Fig. 6, one sector comprises 13 lines. Two sync frames are allocated to each line. The sync signal allocated to each sync frame is selected from the 32 kinds of sync signals shown in Figs. 2 and 3. For

example, the sync signal allocated to a front sync frame of the first line corresponds to SY0 selected from the 32 kinds of sync signals. Subsequent to the first line, the sync signal which is allocated to the front sync frame is cyclically repeated like SY1 to SY4 in accordance with an increase in number of line. Differences among SY1 to SY4 are decided by the specific code and connection bits.

The operation of the synthesizing circuit 30 for forming the transmission signal of one sector will now be described with reference to a flow of Fig. 7.

A CPU (central processing unit) and a memory (they are not shown) are included in the synthesizing circuit 30 and information as shown in Fig. 8 has previously been stored in the memory.

In the flow of Fig. 7, the CPU in the synthesizing circuit 30 first sets 1 as an initial address into a built-in register n (step S1). The CPU reads out information corresponding to the address stored in the register n from the memory shown in Fig. 8, respectively and stores the information into registers X and Y (step S2). When 1 has been stored in the register n, for instance, SY0 and SY5 stored in address 1 in the memory in Fig. 8 are read out and stored into the registers X and Y, respectively.

The CPU selects the sync signal corresponding to the storage contents in the register X from the 32 kinds of sync signals shown in Figs. 2 and 3 which are supplied

from the sync signal generating circuit 20. When SY0 has been stored in the register X, for example, the signal corresponding to SY0 is selected from the 32 kinds of sync signals shown in Figs. 2 and 3. When the code word existing just before the sync signal is Next_State1 (the number of continuous 0 at the termination is equal to 1 or 0) or Next_State2 (the number of continuous 0 at the termination is equal to 2 to 5), the CPU selects the sync signal in which the connection bit pattern by bits 1 to 3 is set to {000} from SY0 shown in Figs. 2 and 3. There are the following two kinds of sync signals SY0 in which the connection bit pattern is equal to {000} in Fig. 2:

{000100100100010000000000000010001}

{000100100000010000000000000010001}

That is, only the values of bit 10 in the specific codes differ with respect to the two sync signals SY0 and the numbers of inverting times of them differ when they are NZI modulated. The CPU selects the pattern which is optimum for the DC suppression from the two kinds of patterns and sets the selected pattern to final SY0.

The CPU selects the sync signal corresponding to the storage contents in the register Y. For example, when SY5 has been stored in the register Y, the sync signal corresponding to SY5 is selected from the 32 kinds of sync signals shown in Figs. 2 and 3. When the code word existing just before the sync signal is Next_State3 (the number of continuous 0 at the termination is equal to 2

to 5) or Next_State4 (the number of continuous 0 at the termination is equal to 6 to 9), the CPU selects the sync signal in which the connection bit pattern by bits 1 to 3 is equal to {100} from SY5 shown in Figs. 2 and 3. There are the following two kinds of sync signals in which the connection bit pattern is equal to {100} in Fig. 3:

{100010010000010000000000000010001}

{100000010000010000000000000010001}

That is, only the values of bit 5 in the specific codes differ with respect to the both patterns. The CPU selects the pattern which is optimum for the DC suppression from the two kinds of patterns and sets the selected pattern to final SY5 (step S3).

The CPU generates a pattern obtained by serially connecting the 8-16 modulation signal of 91 code words to each of the sync signals selected on the basis of the storage contents of the registers X and Y as mentioned above as a transmission signal of one line as shown in Fig. 6 (step S4).

The CPU judges whether the contents in the register n are larger than 13 or not (step S5). In step S5, until it is decided that the contents in the register n are larger than 13, the CPU adds 1 to the contents in the register n (step S6) and, after that, repetitively executes the operations in step S2 and subsequent steps. The transmission signals of the first to 13th lines (of one sector) as shown in Fig. 6 are sequentially generated

by the repetitive operation.

For example, when it is assumed that 16 sectors are error-correction encoded as one error correction block and the resultant block is transmitted, a decoder side which receives the transmission signal with the structure executes an error correcting process by using the transmission signals each of which has the sector structure as shown in Fig. 6 and which are collected by the number as many as 16 sectors as one error-correction block. In the decoder, it is important that after completion of the reception of the transmission signal, the head of the sector is searched, an address recorded is subsequently immediately read out, and data of the error-correction block is collected. When the high-density transmission is executed, there is a case where the sync signal SY0 as a head of the sector cannot be read out or a case where the other signal is erroneously read out as a sector head, so that a possibility such that a fatal error which cannot be corrected is caused occurs.

In the transmission signal according to the invention, as shown in Figs. 2 and 3, the 32 kinds of sync signals having different bit patterns are prepared and, further, as shown in Fig. 6, the combination pattern of the sync signal to be allocated to each line in one sector is set to a unique pattern every line. As shown in Fig. 6, the sync signal in the front sync frame existing

at the head of each line is cyclically repeated like SY1 to SY4 in accordance with an increase in number of lines.

On the decoder side which receives the transmission signal having the structure, the line in one sector can be specified by recognizing the combination pattern of the sync signals, so that the position of SY0 at the sector head can be predicted. When the line is specified, a preventing function can be further raised for a read error of the sync signal by recognizing the repetitive patterns of SY1 to SY4. Since the line is specified on the basis of the combination pattern of the two sync signals existing in one line, it is sufficient to use eight kinds of SY0 to SY7 as kinds of sync signals in one sector.

Even when the sync signal SY0 as a head of the sector cannot be read out due to the influence by the high-density transmission, therefore, on the decoder side, the head position of the sector is recognized on the basis of the sync signal existing after SY0, thereby enabling a correct error-correction block to be recognized.

As will be obviously understood by Figs. 2 and 3, further, SY0 is selected in a manner such that an inter-code distance between SY0 and the head syncs (SY1 to SY4) of each of the other lines becomes maximum. The inter-code distance denotes a similarity between the sync signals. When there is a sync signal in which the number

of 1 differs from that of the other signal, it is determined that the sync signal is a signal of the largest distance. In case of the sync signal in which the number of 1 is equal to that of the other sync signal, the number of shifting times of the position of 1 until the signal coincides with a sync signal is set to the distance with the sync signal. By determining SY0 as mentioned above, a probability such that SY1 to SY4 are erroneously read as SY0 is reduced. In other words, the sync signal which is relatively similar to SY0 is set to the intermediate sync signal (SY5 to SY7) of each line, and a common sync signal is not used in the head and middle portions of each line. When the common sync signal is not used in the head and middle portions of the line, there is also an effect such that a probability such that the head and middle portions of each line is erroneously recognized by the read error is reduced.

As shown in Figs. 2 and 3, even when Next_State of the code word just before the sync signal indicates either one of a case of 1 or 2 and a case of 3 or 4, two kinds of 32-bit patterns in which the even and odd numbers of inverting times (the numbers of 1) and the signs of disparity (a difference between positive and negative bits of the waveform) are different respectively are allocated to SY0 to SY7. That is, as compared with one pattern, since the polarities of the DC component of the other pattern itself and the signal waveform at the

termination of the other pattern are opposite to those of one pattern, the DC component of the signal can be reduced by selecting either one of them.

As mentioned above, in the digital data transmitting method according to the invention, when the digital data is retained in the sectors each comprising a plurality of sync frames and is sequentially transmitted, the sync frame comprises the sync signal and the run length limited code which satisfies the limitations of the minimum run length and the maximum run length, and the sync signal includes the sync pattern comprised of the bit pattern of a run length which is longer than the maximum run length by $3T$ and the addition bit patterns which are arranged before and after the bit pattern and each of which has a run length that is longer than the minimum run length.

According to the invention, therefore, even when the sync signal and signal by the run length limited code are edge-shifted by $1T$, respectively, due to the influence by the inter-symbol interference, they can be correctly distinguished and detected.

In the digital data transmitting method according to the invention, the sync signal includes the specific code which indicates the position in the sector and which enables the DC control to be performed.

With the construction, therefore, even when the sync signal at the head of the sector cannot be read out or

the other signal is erroneously read out as a sector head, a correct head of the sector can be predicted on the basis of other sync signals, so that digital data can be properly reproduced.

The invention has been described above with reference to the preferred embodiments thereof. It will be understood that many modifications and variations can be made by those skilled in the art. All of the modifications and variations are incorporated within the scope of the appended claims.

WHAT IS CLAIMED IS:

1. A transmitting method of digital data for retaining digital data in sectors each comprising a plurality of sync frames and sequentially transmitting it, wherein

said sync frame comprises a sync signal and a run length limited code which corresponds to said digital data and satisfies limitations of a minimum run length and a maximum run length, and

said sync signal includes a sync pattern comprised of a bit pattern of a run length which is longer than said maximum run length by $3T$ and addition bit patterns which are arranged before and after said bit pattern and each of which has a run length that is longer than said minimum run length.

2. A method according to claim 1, wherein among said addition bit patterns, the addition bit pattern arranged after said bit pattern has a fixed length.

3. A method according to claim 1, wherein

said run length limited code is a code obtained by 8-16 modulating said digital data every eight bits so as to satisfy run length limitations of the minimum run length is 2 and the maximum run length is 10, and

said sync pattern is comprised of bit patterns of run lengths of $(4T \text{ or more} - 14T - 4T)$.

4. A transmitting method of digital data for retaining the digital data in sectors each comprising a plurality of sync frames and sequentially transmitting, wherein

said sync frame comprises a sync signal and a run length limited code which corresponds to said digital data and satisfies limitations of a minimum run length and a maximum run length, and

said sync signal includes a specific code indicative of a position in said sector.

5. A method according to claim 4, wherein

said sector comprises a plurality of lines each of which is constituted by said two sync frames, and

a position in said sector is identified by said specific code included in each of said two sync signals included every said line.

6. A method according to claim 5, wherein either one of said two sync signals included every said line is cyclically repeated with an increase in number of said lines, based on said specific code included in said sync signal.

7. A method according to claim 4, wherein said specific code in said sync signal arranged at a head of a first line of said sector has a bit pattern in which an inter-code distance for said sync signal arranged at the head of the other line becomes maximum.

8. A method according to claim 3, wherein a DC control can be performed by the bit patterns of said specific code.

9. A method according to claim 8, wherein two kinds of codes having different numbers of inverting times when

they are NRZI modulated can be selected as said specific code, thereby performing said DC control.

10. A method according to claim 5, wherein

said sector comprises 13 lines each of which is constituted by said two sync frames, and

said sync signal has 32 kinds of bit patterns in order to satisfy the limitations of said minimum run length and said maximum run length, specify the head of said sector and each line, and perform said DC control in a connection with said run length limited code existing just before said sync signal.

11. A method according to claim 7, wherein

said sector comprises 13 lines each of which is constituted by said two sync frames, and

said sync signal has 32 kinds of bit patterns in order to satisfy the limitations of said minimum run length and said maximum run length, specify the head of said sector and each line, and perform said DC control in a connection with said run length limited code existing just before said sync signal.

12. A method according to claim 8, wherein

said sector comprises 13 lines each of which is constituted by said two sync frames, and

said sync signal has 32 kinds of bit patterns in order to satisfy the limitations of said minimum run length and said maximum run length, specify the head of said sector and each line, and perform said DC control in

a connection with said run length limited code existing just before said sync signal.

13. A transmitting method of digital data for retaining digital data in sectors each comprising a plurality of sync frames and sequentially transmitting, wherein

said sync frame comprises a sync signal of 32 bits and a run length limited code obtained by 8-16 modulating said digital data every eight bits so as to satisfy run length limitations of a minimum run length is 2 and a maximum run length is 10, and

said sync signal comprises: a connection bit of three bits arranged so as to satisfy the limitations of said minimum run length is 2 and said maximum run length is 10 in a connection with said run length limited code existing just before said sync signal; a specific code of seven bits which satisfies the limitations of said minimum run length = 2 and said maximum run length = 10 and which has 32 kinds of bit patterns; and sync patterns of run lengths of (4T or more - 14T - 4T).

14. A method according to claim 13, wherein said sync signal has 32 kinds of bit patterns shown in the following Table 1 and Table 2, and an arrangement of said sync signals in each line of said sector is set to an arrangement shown in the following Table 3:

SECRET 336543

Table 1

SY0	000	1001001	000100 0000000000010001	000	1001000	000100 0000000000010001
SY1	000	0010000	000100 0000000000010001	000	0010001	000100 0000000000010001
SY2	000	1000000	000100 0000000000010001	000	1000001	000100 0000000000010001
SY3	000	0100000	000100 0000000000010001	000	0100001	000100 0000000000010001
SY4	001	0000000	000100 0000000000010001	001	0000001	000100 0000000000010001
SY5	001	0001001	000100 0000000000010001	001	0001000	000100 0000000000010001
SY6	001	0010010	000100 0000000000010001	001	0000010	000100 0000000000010001
SY7	001	0010001	000100 0000000000010001	001	0010000	000100 0000000000010001

Table 2

SY0	100	1001000	000100 0000000000010001	100	1001001	000100 0000000000010001
SY1	100	0010001	000100 0000000000010001	100	0010000	000100 0000000000010001
SY2	100	1000001	000100 0000000000010001	100	1000000	000100 0000000000010001
SY3	100	0001001	000100 0000000000010001	100	0001000	000100 0000000000010001
SY4	100	0100001	000100 0000000000010001	100	0100000	000100 0000000000010001
SY5	100	0100100	000100 0000000000010001	100	0000100	000100 0000000000010001
SY6	100	1000010	000100 0000000000010001	100	0000001	000100 0000000000010001
SY7	100	0100010	000100 0000000000010001	100	0000010	000100 0000000000010001

Table 3

	32bits	1456bits	32bits	1456bits
1st LINE	SYNC SIGNAL SY0	LUN LENGTH LIMITED CODE	SYNC SIGNAL SY5	LUN LENGTH LIMITED CODE
2nd LINE	SYNC SIGNAL SY1	LUN LENGTH LIMITED CODE	SYNC SIGNAL SY5	LUN LENGTH LIMITED CODE
3rd LINE	SYNC SIGNAL SY2	LUN LENGTH LIMITED CODE	SYNC SIGNAL SY5	LUN LENGTH LIMITED CODE
4th LINE	SYNC SIGNAL SY3	LUN LENGTH LIMITED CODE	SYNC SIGNAL SY5	LUN LENGTH LIMITED CODE
5th LINE	SYNC SIGNAL SY4	LUN LENGTH LIMITED CODE	SYNC SIGNAL SY5	LUN LENGTH LIMITED CODE
6th LINE	SYNC SIGNAL SY1	LUN LENGTH LIMITED CODE	SYNC SIGNAL SY6	LUN LENGTH LIMITED CODE
7th LINE	SYNC SIGNAL SY2	LUN LENGTH LIMITED CODE	SYNC SIGNAL SY6	LUN LENGTH LIMITED CODE
8th LINE	SYNC SIGNAL SY3	LUN LENGTH LIMITED CODE	SYNC SIGNAL SY6	LUN LENGTH LIMITED CODE
9th LINE	SYNC SIGNAL SY4	LUN LENGTH LIMITED CODE	SYNC SIGNAL SY6	LUN LENGTH LIMITED CODE
10th LINE	SYNC SIGNAL SY1	LUN LENGTH LIMITED CODE	SYNC SIGNAL SY7	LUN LENGTH LIMITED CODE
11th LINE	SYNC SIGNAL SY2	LUN LENGTH LIMITED CODE	SYNC SIGNAL SY7	LUN LENGTH LIMITED CODE
12th LINE	SYNC SIGNAL SY3	LUN LENGTH LIMITED CODE	SYNC SIGNAL SY7	LUN LENGTH LIMITED CODE
13th LINE	SYNC SIGNAL SY4	LUN LENGTH LIMITED CODE	SYNC SIGNAL SY7	LUN LENGTH LIMITED CODE
	FRONT SYNC FRAME		REAR SYNC FRAME	

ABSTRACT OF THE DISCLOSURE

A transmitting method of digital data whereby information data can be reproduced at a high precision. In order to retain digital data in sectors comprising a plurality of sync frames and sequentially transmit, the sync frame is comprised of the sync signal and the run length limited code which satisfies the limitations of the minimum run length and the maximum run length, and the sync signal includes the sync pattern constituted by a bit pattern of a run length that is longer than the maximum run length by only $3T$ and addition bit patterns which are arranged before and after the bit pattern and each of which has a run length that is longer than the minimum run length. The sync signal includes a specific code which indicates a position in the sector and which enables the DC control to be performed.

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that my residence, post office address and citizenship are as stated below next to my name: that I verily believe I am the original, first and sole inventor (if only one name is listed below) or a joint inventor (if plural names are listed below) of the subject matter claimed and for which a patent is sought in the application entitled:

DIGITAL DATA TRANSMITTING METHOD

which application is:

the attached application
(for original application)

X application Serial No. 08/759,956
filed December 3, 1996 and amended on

(for declaration not accompanying application)

that I have reviewed and understand the contents of the specification of the above-identified application, including the claims, as amended by any amendment referred to above; that I acknowledge my duty to disclose information of which I am aware which is material to the patentability of this application under 37 C.F.R. 1.56, that I hereby claim foreign priority benefits under Title 35, United States Code §119, §172 or §365 of any foreign application(s) for patent or inventor's certificate listed below and have also identified on said list any foreign application for patent or inventor's certificate on this invention having a filing date before that of the application on which priority is claimed:

Application Number	Country	Filing Date	Priority Claimed (yes or no)
P7-316420	Japan	December 5, 1995	yes

I hereby claim the benefit of Title 35, United States Code §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in a listed prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge my duty to disclose any information material to the patentability of this application under 37 C.F.R. 1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

Application Serial No.	Filing Date	Status (patented, pending, abandoned)
28		

I hereby appoint John H. Mion, Reg. No. 18,879; Donald E. Zinn, Reg. No. 19,046; Thomas J. Macpeak, Reg. No. 19,292; Robert J. Seas, Jr., Reg. No. 21,092; Darryl Mexic, Reg. No. 23,063; Robert V. Sloan, Reg. No. 22,775; Peter D. Olexy, Reg. No. 24,513; J. Frank Osha, Reg. No. 24,625; Waddell A. Biggart, Reg. No. 24,861; Robert G. McMorro, Reg. No. 19,093; Louis Gubinsky, Reg. No. 24,835; Neil B. Siegel, Reg. No. 25,200; David J. Cushing, Reg. No. 28,703; John R. Inge, Reg. No. 26,916; Joseph J. Ruch, Jr., Reg. No. 26,577; Sheldon I. Landsman, Reg. No. 25,430; Richard C. Turner, Reg. No. 29,710; Howard L. Bernstein, Reg. No. 25,665; Alan J. Kasper, Reg. No. 25,426; Kenneth J. Burchfiel, Reg. No. 31,333; Gordon Kit, Reg. No. 30,764; Susan J. Mack, Reg. No. 30,951; Frank L. Bernstein, Reg. No. 31,484; Mark Boland, Reg. No. 32,197; William H. Mandir, Reg. No. 32,156; Scott M. Daniels, Reg. No. 32,562; Brian W. Hannon, Reg. No. 32,778 and Abraham J. Rosner, Reg. No. 33,276, my attorneys to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith, and request that all correspondence about the application be addressed to SUGHRUE, MION, ZINN, MACPEAK & SEAS, 2100 Pennsylvania Avenue, N.W., Washington, D.C. 20037-3202.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Date January 13, 1997

First Inventor Tadashi

KOJIMA

1-00

First Name

Middle Initial

Last Name

Residence Yokohama-shi, Kanagawa-ken,

Signature Tadashi

Kojima

Japan

JPX

Post Office Address 4-77-19, Tomiokanishi, Kanazawa-ku,

Citizenship Japanese

Yokohama-shi, Kanagawa-ken, 236 Japan

→
vke

Date January 13, 1997

Second Inventor Koichi
First Name Middle Initial Last Name

HIRAYAMA 2-00
Last Name

Residence Yokohama-shi, Kanagawa-ken,
Japan JPX

Signature Koichi Hirayama
Post Office Address 1-7-10, Gumizawa, Totsuka-ku,
Yokohama-shi, Kanagawa-ken, 245 Japan

Citizenship Japanese

Date January 13, 1997

Third Inventor Hisashi
First Name Middle Initial Last Name

YAMADA 3-00
Last Name

Residence Yokohama-shi, Kanagawa-ken,
Japan JPX

Signature Hisashi Yamada
Post Office Address 2709-3, Totsuka-cho, Totsuka-ku,
Yokohama-shi, Kanagawa-ken, 244 Japan

Citizenship Japanese

Date January 13, 1997

Fourth Inventor Yoshiaki
First Name Middle Initial Last Name

MORIYAMA 4-00
Last Name

Residence Tsurugashima-shi,
Saitama, Japan JPX

Signature Yoshiaki Moriyama
Post Office Address 6-1-1, Fujimi, Tsurugashima-shi, Saitama
350-02, Japan, c/o Corporate Research and Development
Laboratory, Pioneer Electronic Corporation

Citizenship Japanese

Date January 13, 1997

Fifth Inventor Fumihiko
First Name Middle Initial Last Name

YOKOGAWA 5-00
Last Name

Residence Tsurugashima-shi, JPX
Saitama, Japan

Signature Fumihiko Yokogawa
Post Office Address 6-1-1, Fujimi, Tsurugashima-shi, Saitama
350-02, Japan, c/o Corporate Research and Development
Laboratory, Pioneer Electronic Corporation

Citizenship Japanese

Date January 13, 1997

Sixth Inventor Takao
First Name Middle Initial Last Name

ARAI 6-00
Last Name

Residence Yokohama-shi, JPX
Kanagawa, Japan

Signature Takao Arai
Post Office Address 65-24, Ibukino, Midori-ku, Yokohama-shi,
Kanagawa, 226 Japan

Citizenship Japanese

Date January 13, 1997

Seventh Inventor Toshifumi
First Name Middle Initial Last Name

TAKEUCHI 7-00
Last Name

Residence Yokohama-shi, Kanagawa,
Japan JPX

Signature Toshifumi Takeuchi
Post Office Address Obirin hights D109, 307-2, Minezawa-cho,
Hodogaya-ku, Yokohama-shi, Kanagawa, 240 Japan

Citizenship Japanese

over

Date January 13, 1997.
Residence Tuzukigun, Kyotofu, Japan
JPX
Citizenship Japanese

Eighth Inventor Shinichi TANAKA 8-00
First Name Middle Initial Last Name
Signature Shinichi Tanaka
Post Office Address 1-42-14, Yamatehigashi, Tanabecho,
Tuzukigun, Kyotofu, Japan

Date January 13, 1997
Residence Yawatashi, Kyotofu, Japan
JPX
Citizenship Japanese

Ninth Inventor Akira KURAHASHI 4-00
First Name Middle Initial Last Name
Signature Akira Kurahashi
Post Office Address 11-6, Yawata Yamada, Yawatashi,
Kyotofu, Japan

Date January 13, 1997
Residence Kobeshi, Hyogoken, Japan
JPX
Citizenship Japanese

Tenth Inventor Toshiyuki SHIMADA 10-00
First Name Middle Initial Last Name
Signature Toshiyuki Shimada
Post Office Address 4-11-11, Kanokodaikitamachi, Kitaku,
Kobeshi, Hyogoken, Japan

Date _____
Residence _____
Citizenship _____

Eleven-
th Inventor _____
First Name Middle Initial Last Name
Signature _____
Post Office Address _____

Date _____
Residence _____
Citizenship _____


Twelf-
th Inventor _____
First Name Middle Initial Last Name
Signature _____
Post Office Address _____

Date _____
Residence _____
Citizenship _____

Thirteen-
th Inventor _____
First Name Middle Initial Last Name
Signature _____
Post Office Address _____

08/759956
PU01-9659
EP01-9659
PKR01-9659
PTW01-9659
PCN01-9659
PMX01-9659
PHK01-9659
PMY01-9659
PTH01-9659
PIN01-9659
PID01-9659
PSG01-9659
PVN01-9659

FIG. 1

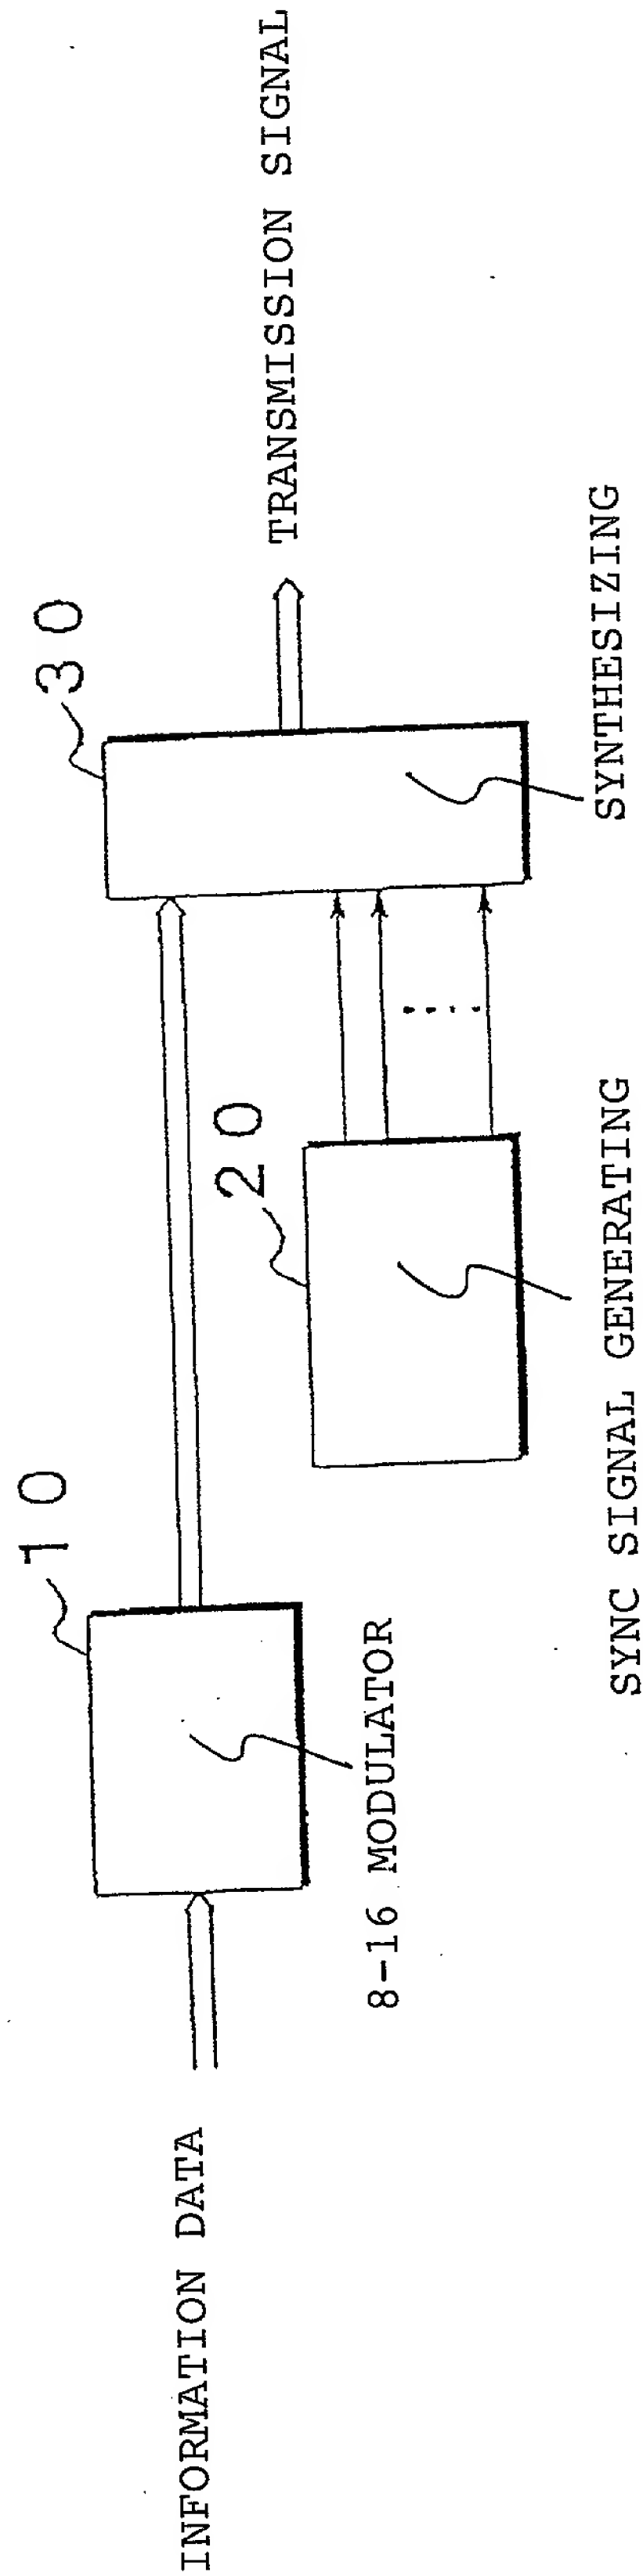

08/759956
PUP01-9659
EP01-9659
PKR01-9659
PTW01-9659
PCN01-9659
PMX01-9659
PHK01-9659
PMY01-9659
PTH01-9659
PIN01-9659
PID01-9659
PSG01-9659
PVN01-9659

FIG. 2


SYNC SIGNAL WHEN CODE WORD JUST BEFORE IS NEXT_STATE 1 OR 2									
	BIT				BIT				BIT 32
	1234	1001			1234	1001			
SY 0	0001001001	000100	00000000000010001	0001001000	000100	00000000000010001	000100	00000000000010001	
SY 1	0000010000	000100	00000000000010001	0000010001	000100	00000000000010001	0000010001	000100	00000000000010001
SY 2	0001000000	000100	00000000000010001	0001000001	000100	00000000000010001	000100	00000000000010001	
SY 3	0000100000	000100	00000000000010001	0000100001	000100	00000000000010001	0000100001	000100	00000000000010001
SY 4	0010000000	000100	00000000000010001	0010000001	000100	00000000000010001	0010000001	000100	00000000000010001
SY 5	0010001001	000100	00000000000010001	0010001001	000100	00000000000010001	0010001001	000100	00000000000010001
SY 6	0010010010	000100	00000000000010001	0010010010	000100	00000000000010001	0010010010	000100	00000000000010001
SY 7	0010010001	000100	00000000000010001	0010010001	000100	00000000000010001	0010010001	000100	00000000000010001


FIG. 3

SYNC SIGNAL WHEN CODE WORD JUST BEFORE IS NEXT_STATE 3 OR 4									
	BIT				BIT				32
	1	2	3	4	1	2	3	4	
SY 0	1001001000	000100	0000000000	00010001	1001001001	000100	0000000000	00010001	
SY 1	1000010001	000100	0000000000	00010001	1000010000	000100	0000000000	00010001	
SY 2	1001000001	000100	0000000000	00010001	1001000000	000100	0000000000	00010001	
SY 3	1000001001	000100	0000000000	00010001	1000001000	000100	0000000000	00010001	
SY 4	1000100001	000100	0000000000	00010001	1000100000	000100	0000000000	00010001	
SY 5	1000100100	000100	0000000000	00010001	1000000100	000100	0000000000	00010001	
SY 6	1001000010	000100	0000000000	00010001	1000000001	000100	0000000000	00010001	
SY 7	1000100010	000100	0000000000	00010001	1000000010	000100	0000000000	00010001	

081-9659
EP01-9659
PKR01-9659
PTW01-9659
PCN01-9659
PMX01-9659
PHK01-9659
PMY01-9659
PTH01-9659
PIN01-9659
PID01-9659
PSG01-9659
PVN01-9659


FIG. 4.

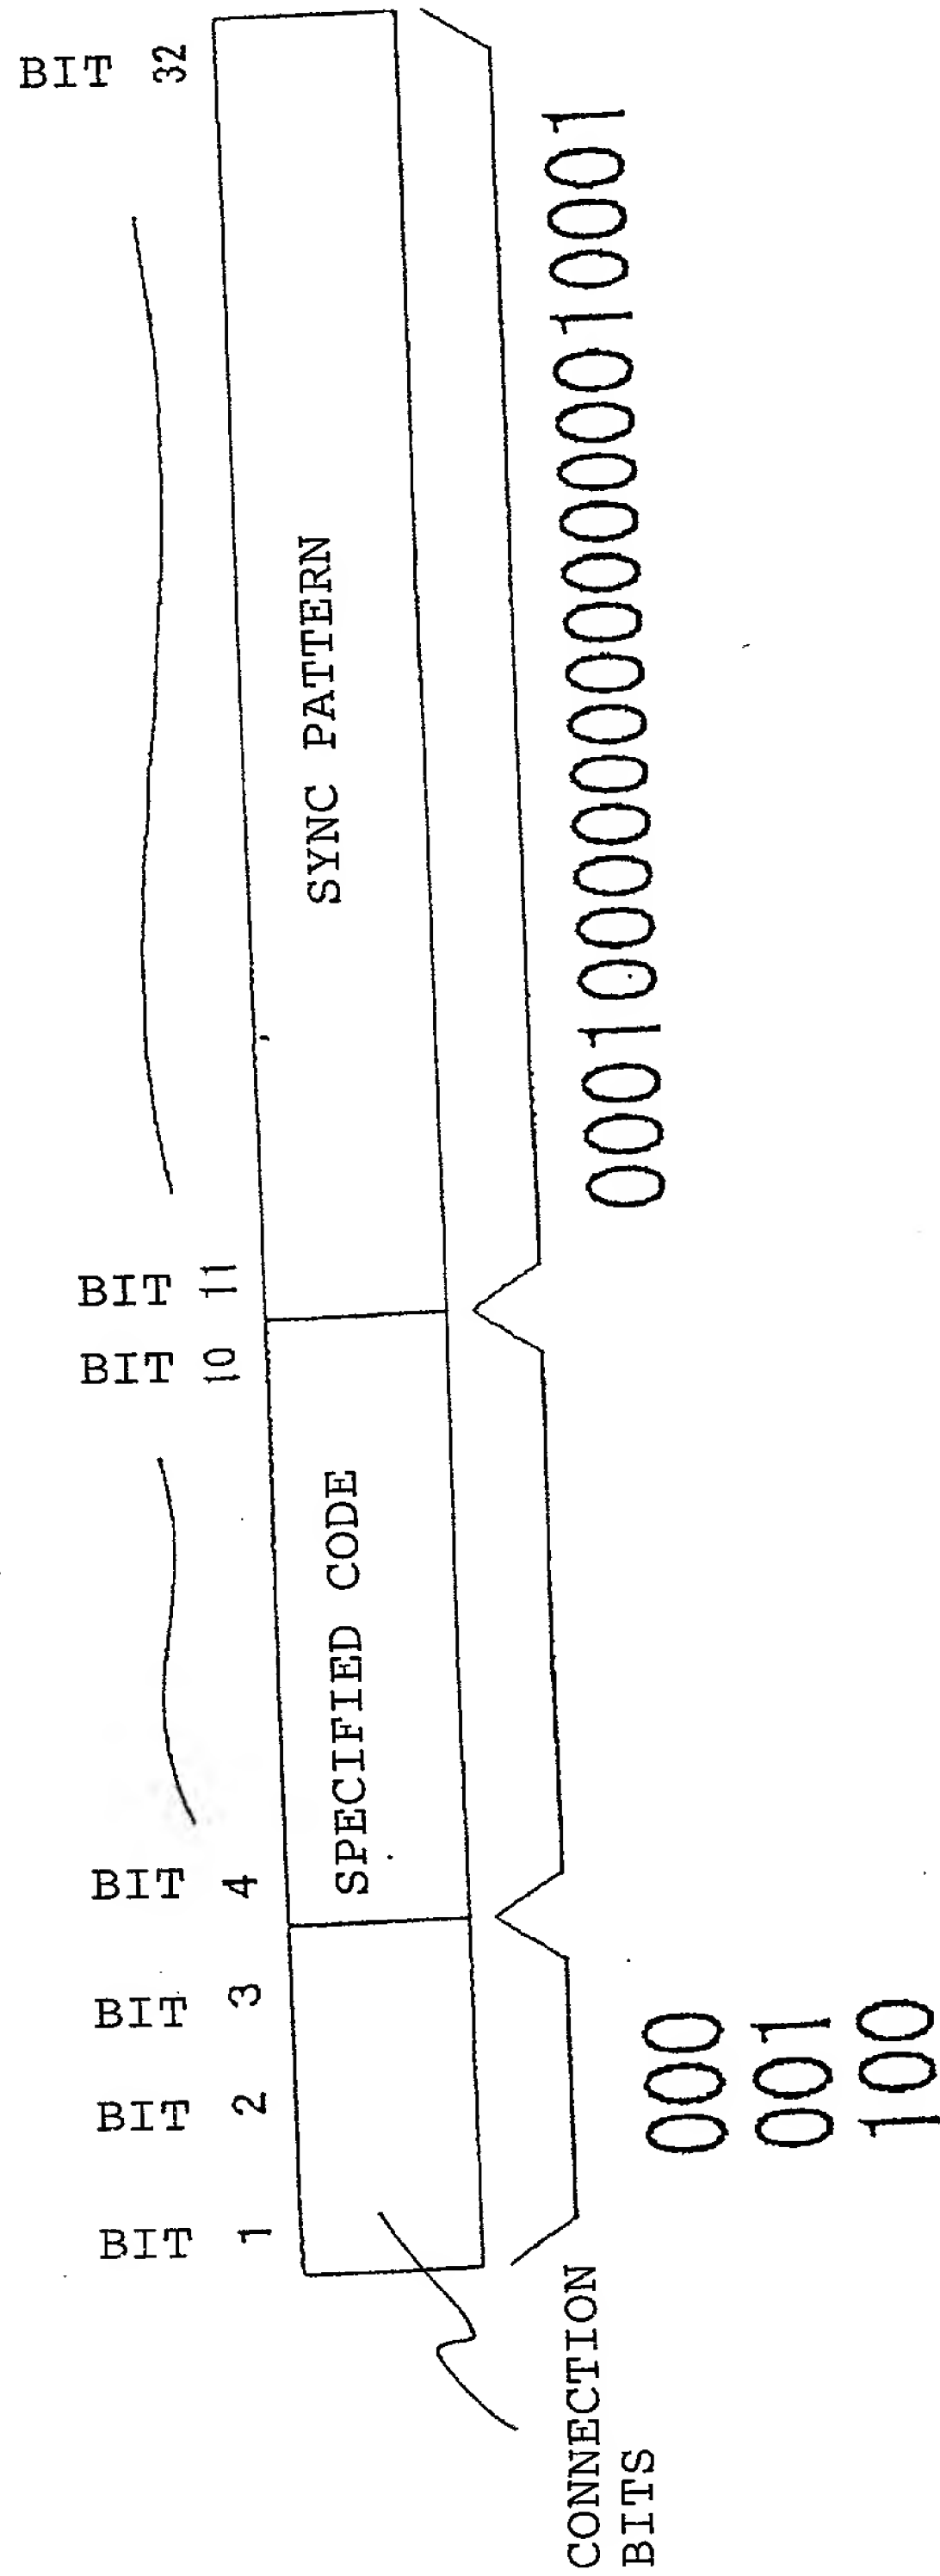

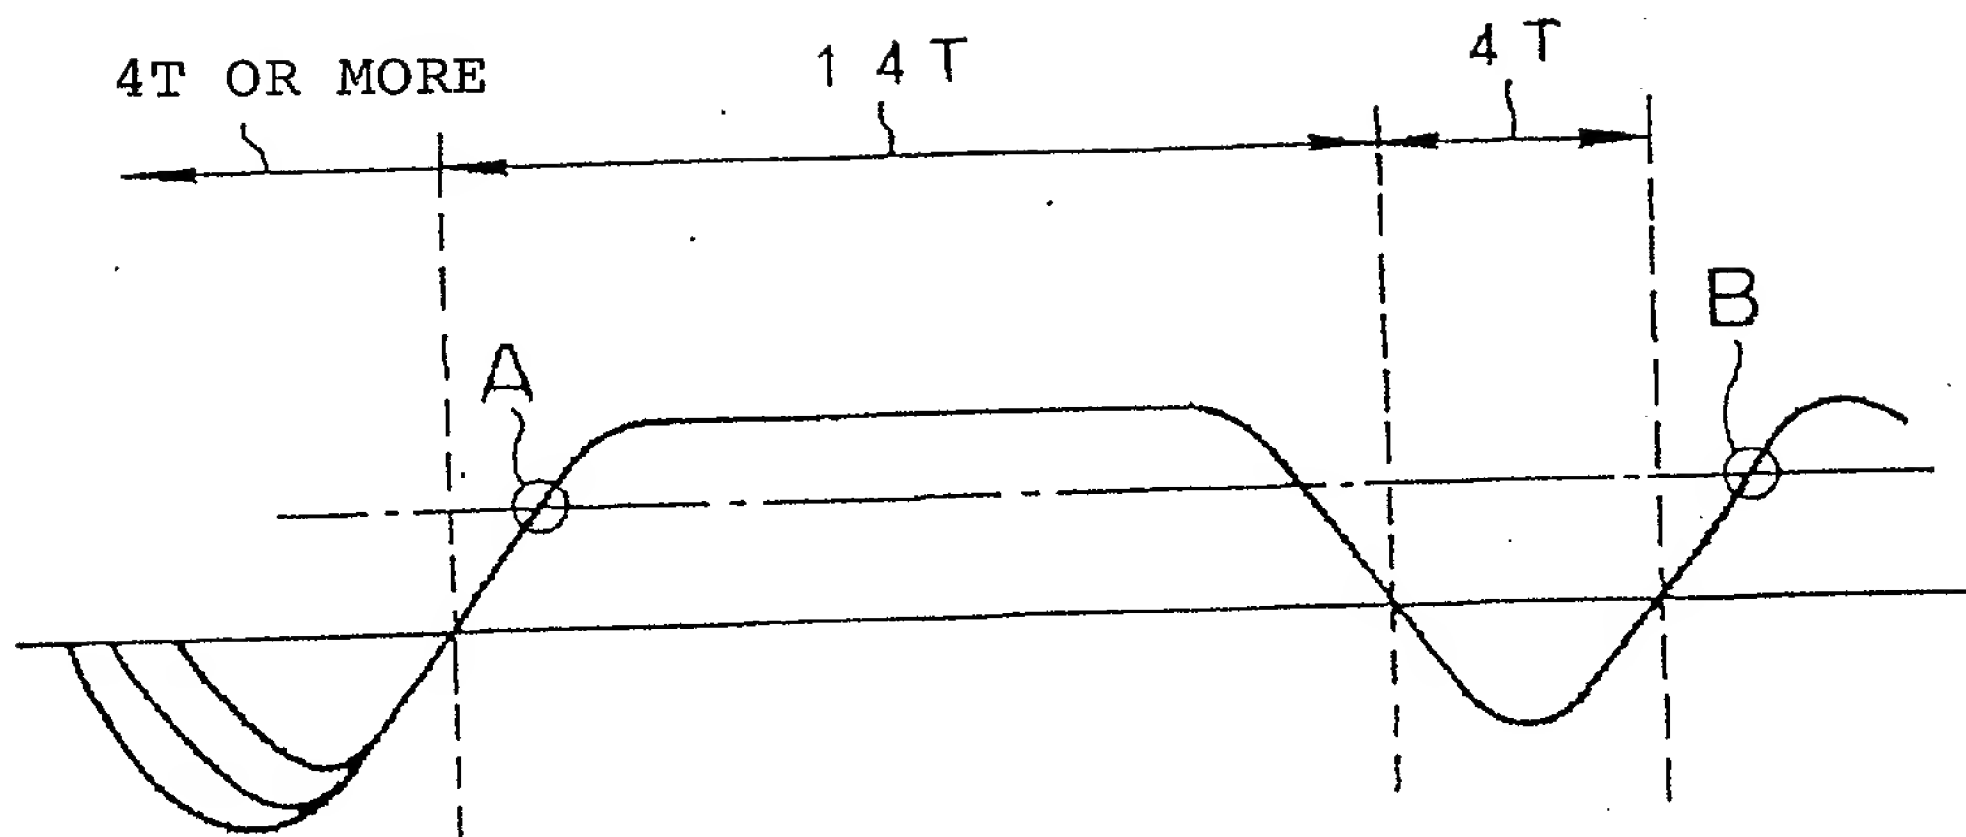

08/759956


FIG. 6

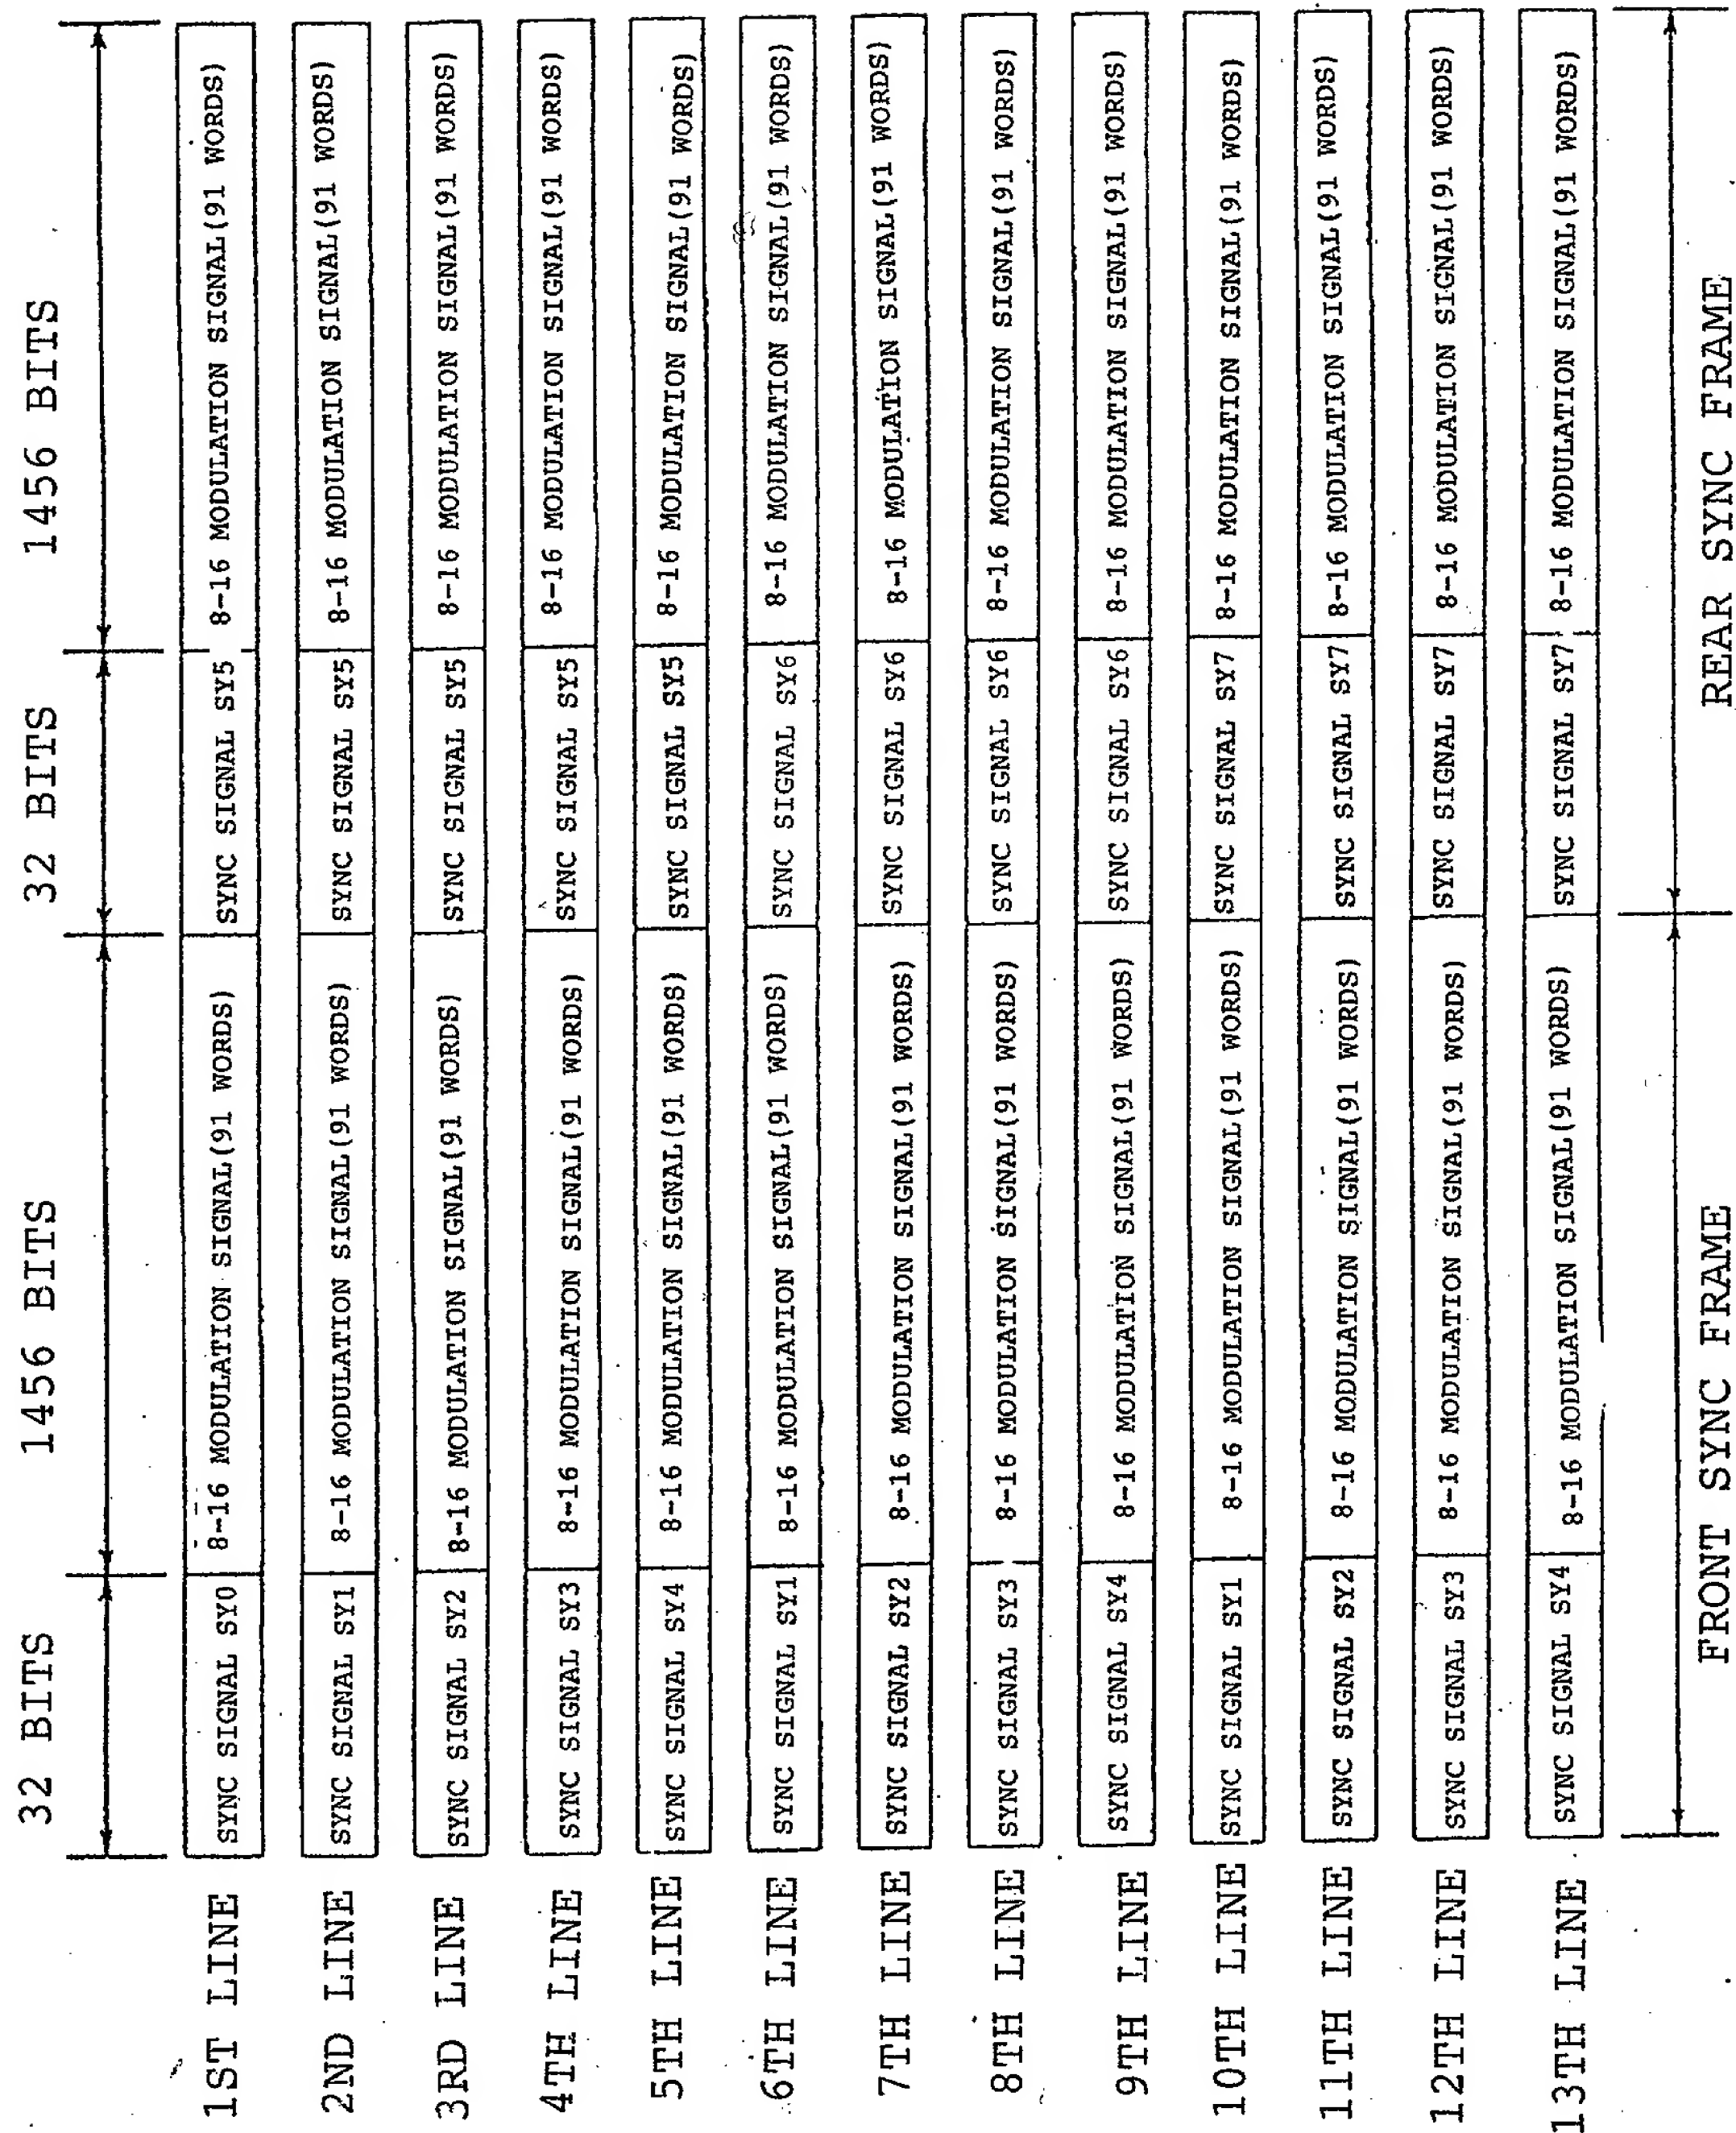

~~PU01-9659~~
~~EP01-9659~~
~~PKR01-9659~~
~~PTW01-9659~~
~~PCN01-9659~~
~~PMX01-9659~~
~~PHK01-9659~~
~~PMY01-9659~~
~~PTH01-9659~~
~~PIN01-9659~~
~~PID01-9659~~
~~PSC01-9659~~
~~PVN01-9659~~

PU01-9659
EP01-9659
PKR01-9659
PTW01-9659
PCN01-9659
PMX01-9659
PHK01-9659
PMY01-9659
PTH01-9659
PIN01-9659
PID01-9659
PSG01-9659
PVN01-9659

FIG. 7

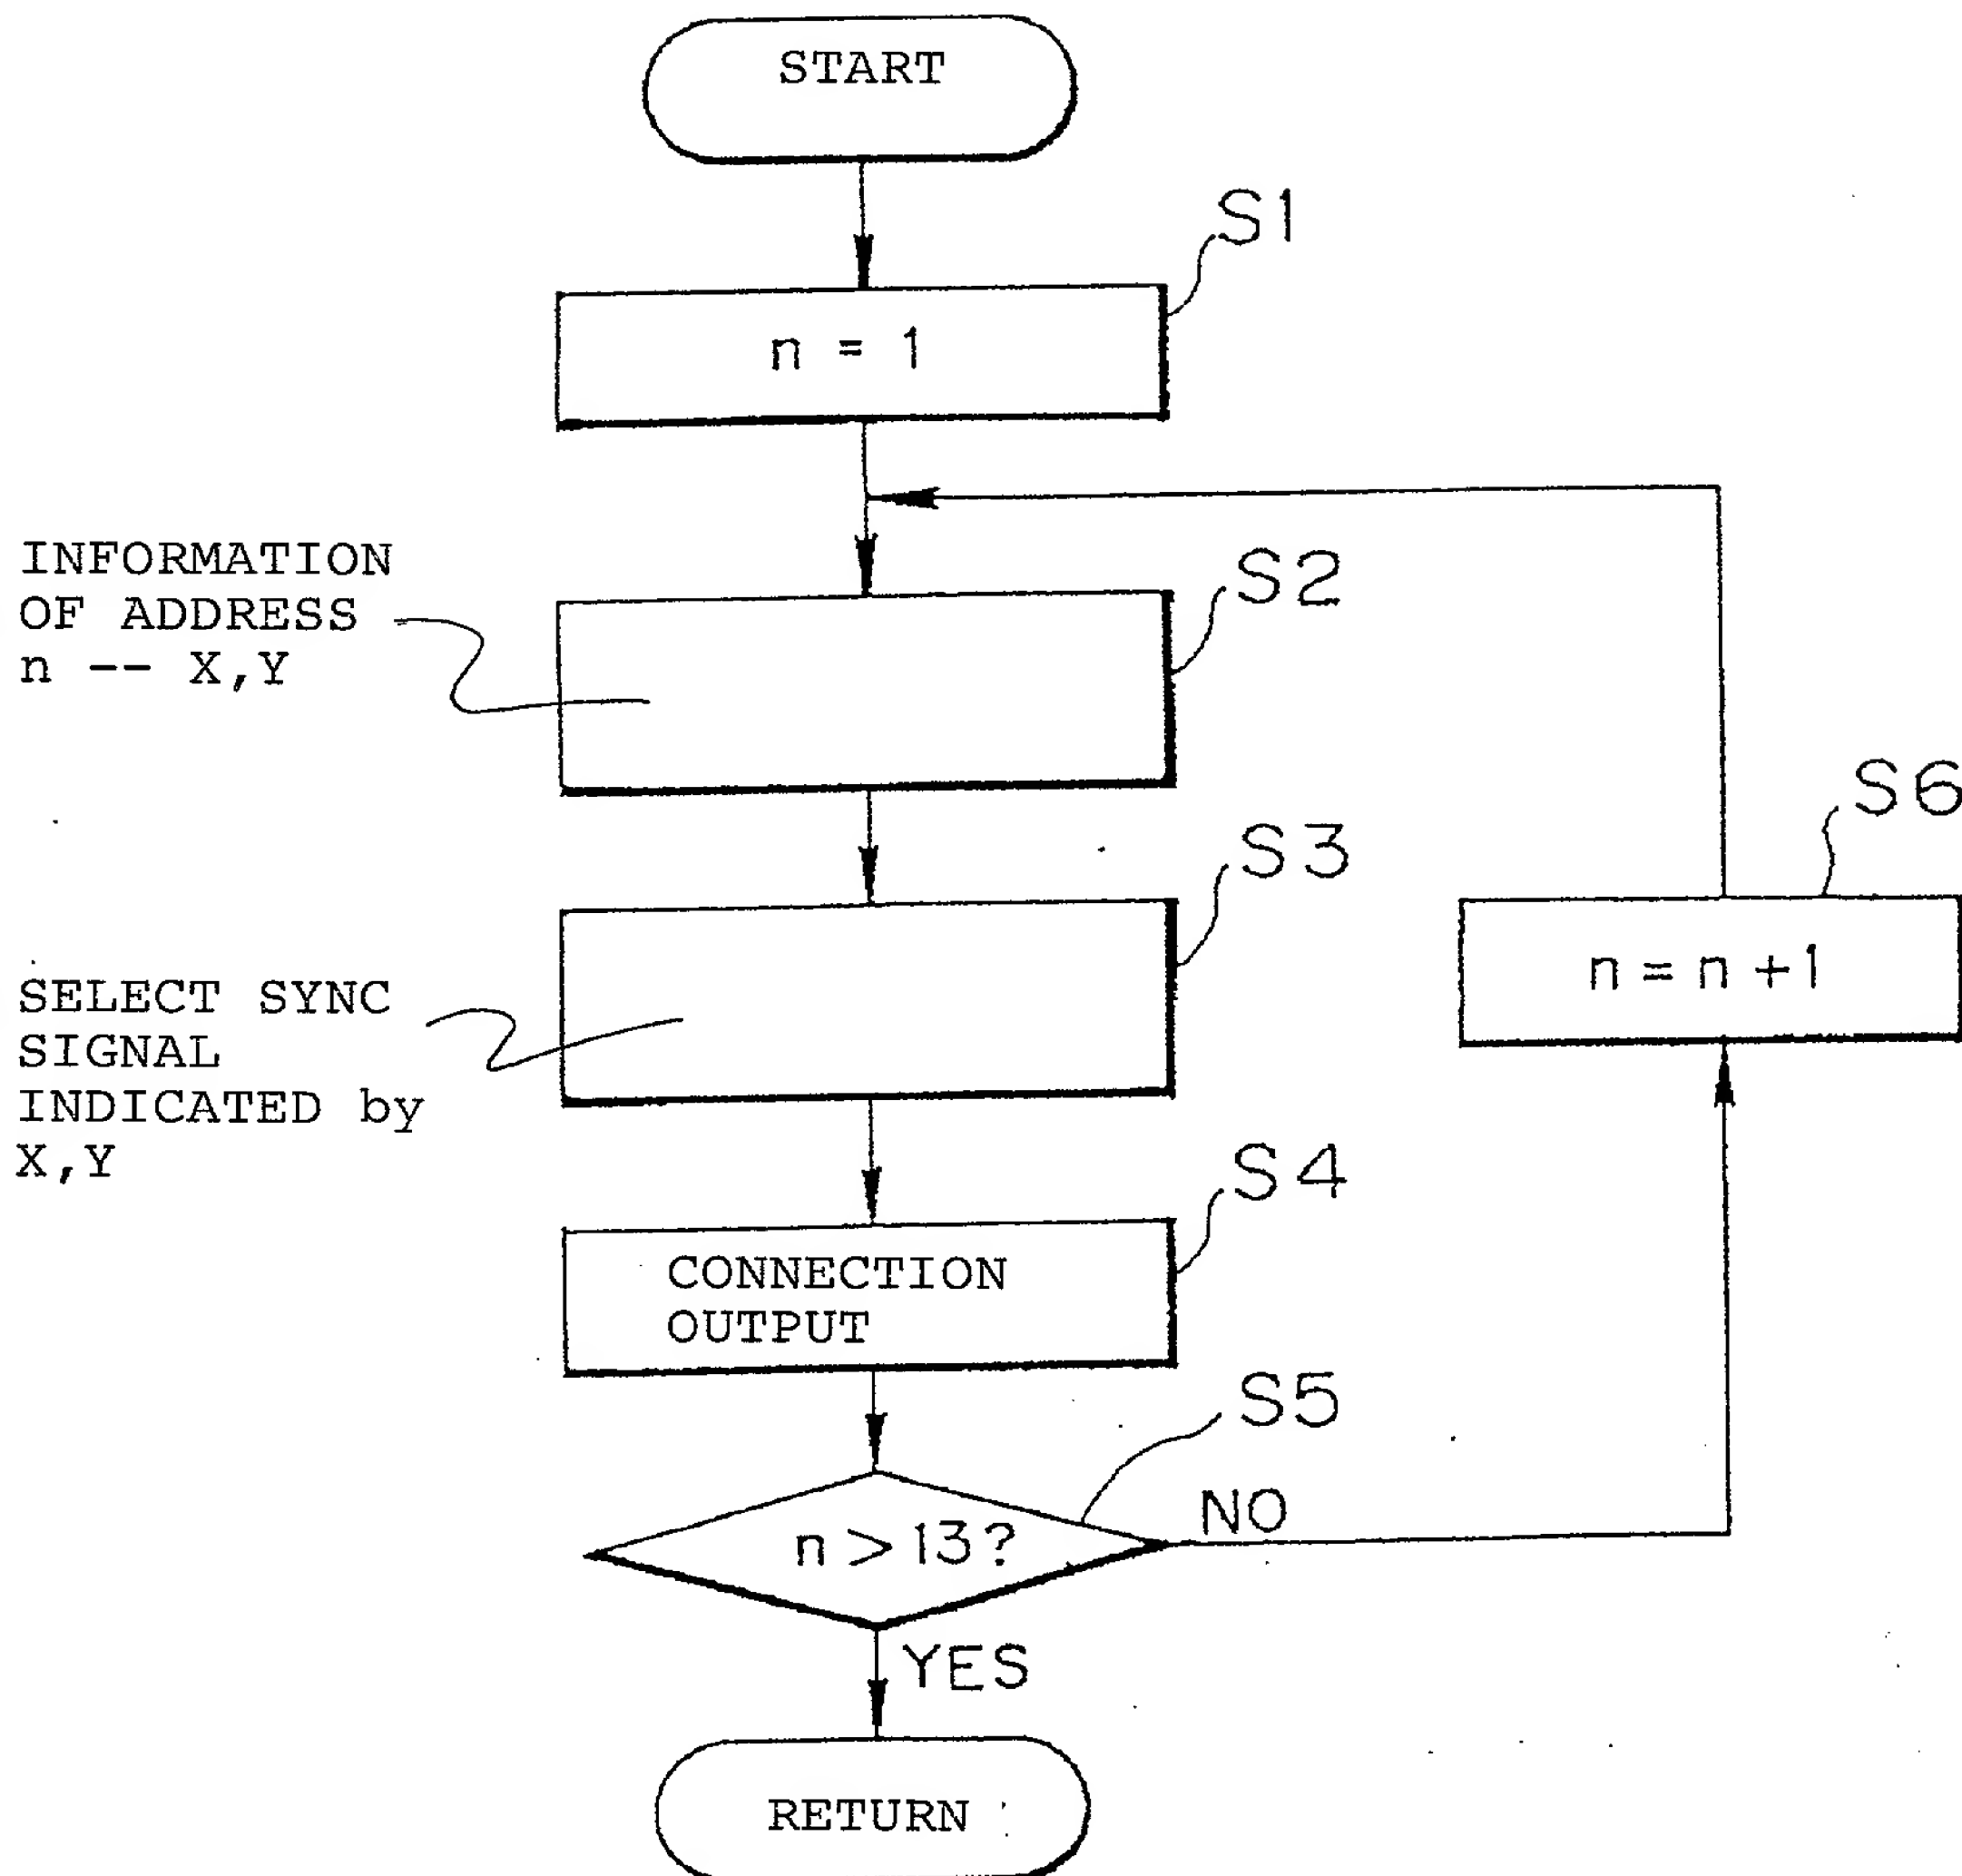

PU01-9659
 EP01-9659
 PKR01-9659
 PTW01-9659
 PCN01-9659
 PMX01-9659
 PHK01-9659
 PMY01-9659
 PTH01-9659
 PIN01-9659
 PID01-9659
 PSG01-9659
 PVN01-9659

FIG. 8

1	SY 0	SY 5
2	SY 1	SY 5
3	SY 2	SY 5
4	SY 3	SY 5
5	SY 4	SY 5
6	SY 1	SY 6
7	SY 2	SY 6
8	SY 3	SY 6
9	SY 4	SY 6
10	SY 1	SY 7
11	SY 2	SY 7
12	SY 3	SY 7
13	SY 4	SY 7